


NOTE:
ALL PIPE JOINTS TO BE SEALED WITH
TEFLON PIPE THREAD TAPE.

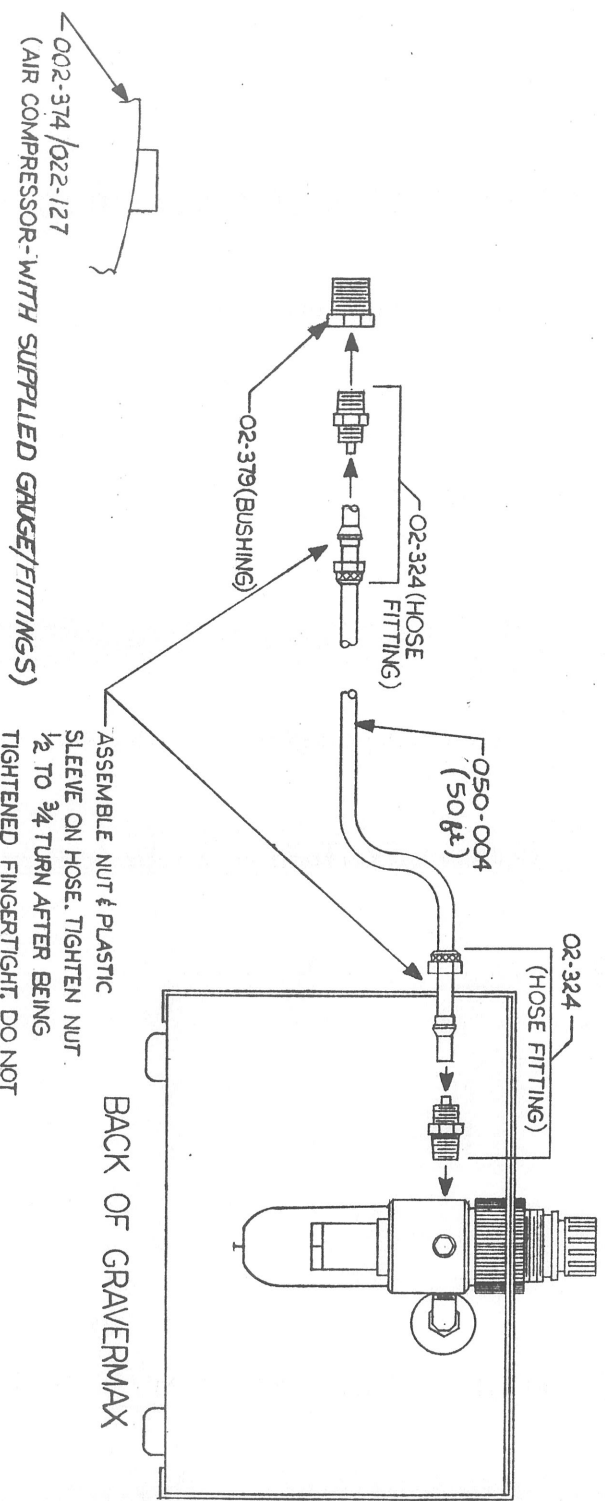

004-526
B
REV.

ASSEMBLE NUT & PLASTIC
SLEEVE ON HOSE. TIGHTEN NUT
1/2 TO 3/4 TURN AFTER BEING
TIGHTENED FINGERTIGHT. DO NOT
USE PIPE TAPE ON THESE CONNECTIONS.

BACK OF GRAVERMAX

LIMITS EXCEPT AS SHOWN		FINISH		MATERIAL	
ANGLE	1 1/2°	HEAT TREAT	NOTED	NAME	GLENDON CORPORATION
DECIMAL	2.010	SPEC.	NOTED	EMPIRIAL, KANSAS 66601	
FRACTION	21/32	HEAT TREAT	NOTED	NAME	AIR COMPRESSOR ASS'Y
DO NOT SCALE		SPEC.	NOTED	DRAWN	RB
		HEAT TREAT	NOTED	CHK'D	DATE 6-10-83
		SPEC.	NOTED	APPR'D	DATE
		INIT	JB	DATE	NUMBER 004-526
REVISION	DATE	LET	DATE	SCALE	REV B
B	7-30-91	A			
ADDED 002-374 / 022-127 COMPRESSORS					
REMOVED FACTORY PRESSURE SETTINGS					
REMOVED 02-376, 02-377, 02-378					
02-380 - NOW SUPPLIED - 730					